


SIDEWALK (CURBED EDGE)

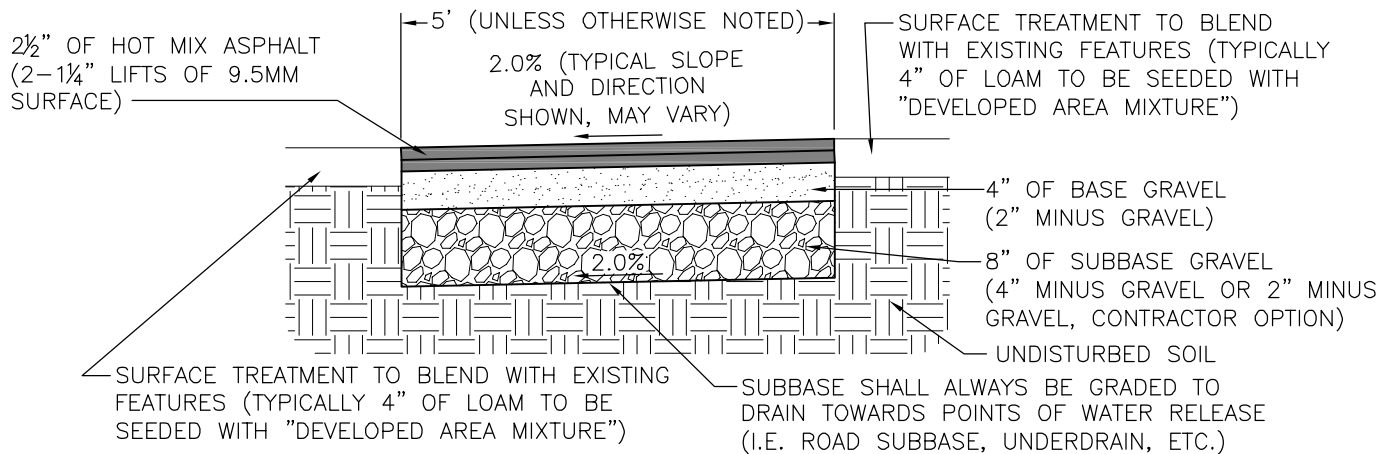

SIDEWALK (NON-CURBED EDGE)


NOTES:

1. HOT MIX ASPHALT MAY BE REDUCED TO ONE LIFT WITH EQUIPMENT APPROVED BY THE CITY ENGINEER OR THEIR REPRESENTATIVE. NO MORE THAN 2½" THICK LIFTS OF HOT MIX ASPHALT SHALL BE PLACED IN ONE PASS.
2. SUBBASE AGGREGATE, BASE AGGREGATE, AND BACKFILL MATERIAL MAY BE PLACED IN 12" LIFTS WITH EQUIPMENT APPROVED BY THE CITY ENGINEER OR THEIR REPRESENTATIVE. BACKFILL AND COMPACT IN 8" THICK MAXIMUM LIFTS.
3. ALL REPAIRS TO SIDEWALKS WILL BE DONE TO ENTIRE WIDTH OF PAVEMENT.

SIDEWALK DETAIL (NOT TO SCALE)

CITY OF BREWER
DETAILS
BREWER - MAINE

DESIGNED BY: JPH
DRAWN BY: JPH
CHECKED BY: FBH
DATE: JAN. 30, 2012
PROJECT NO.:
00-0000-00
FILE NAME:



CITY OF BREWER
ENGINEERING DEPARTMENT
221 GREENPOINT ROAD
BREWER, ME 04412
PHONE: 989-7800
FAX: 989-8024